

BM


BATTERY MONITOR

INCLUDES SHUNT RATED WITH
10 to 120 V | max. 50/100/350/500 A



Technical Specifications

Dimensions (L x W x H)	115 x 75 x 23mm
Weight	75g
Temperature range	0 to 35°C
Voltage accuracy	± 2.0%
Current accuracy	± 2.0%
Capacity accuracy	± 2.0%
Working dissipation	10.0 to 15.0mA
Standby dissipation	1.0 to 2.0mA

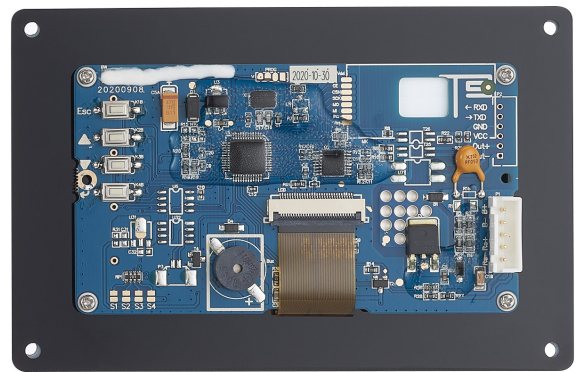

Each ECTIVE Battery Monitor kit contains:

- 1 x ECTIVE Battery Monitor
- 1 x Shielded cable
- 1 x Manual
- 1 x Shunt rated for
50A (BM50)
or 100A (BM100)
or 350A (BM350)
or 500A (BM500)



50 A shunt (BM50)

or




100 A shunt (BM100)

or



350 A shunt (BM350)

or



500 A shunt (BM500)