



LC 260L

LiFePO₄ Battery | 12.8V | 260Ah | 3328Wh

Electrical Specifications

Nominal Voltage	12.8V
Nominal Capacity	260Ah
Capacity Tolerance	± 4%
Capacity @ 25 A	624min
Energy	3328Wh
Resistance	≤ 10 mΩ @ 50% SOC
Self Discharge	< 3% / month
Cell Type	IFR26650EC - LiFePO ₄

Discharge Specifications

Max. Continuous Discharge Current	100A
Peak Discharge Current	150A (30min)
BMS Discharge Cut-Off Current	400A ±50A (100 to 300ms)
Recommended Low Voltage Disconnect	11V
BMS Discharge Cut-Off Voltage	> 8.8V (1000 to 5000ms)
Reconnect Voltage	> 10.8V (2.7V/Zelle)
Short Circuit Protection	200 to 500µs

Charge Specifications

Recommended Charge Current	52A
Maximum Charge Current	100A
Recommended Charge Voltage	14.6V
BMS Charge Cut-Off Voltage	< 15.4V (3.85V/Zelle)
Reconnect Voltage	> 14.6V (3.65V/Zelle)
Float Charge Voltage	< 14.4V (3.6V/Zelle)
Maximum Batteries in Series	4


Mechanical Specifications

Measurements (L × W × H)	520 × 267 × 228 mm
Approx. Weight	34.2 kg
Terminal Type	M8
Terminal Torque	9 to 11 N m
Case Material	ABS
Enclosure Protection	IP65

Temperature Specifications

Discharge Temperature	-20 to 60°C
Charge Temperature	0 to 45°C
Storage Temperature	-5 to 35°C
BMS High Temperature Cut-Off	65°C
Reconnect Temperature	55°C


Measurements

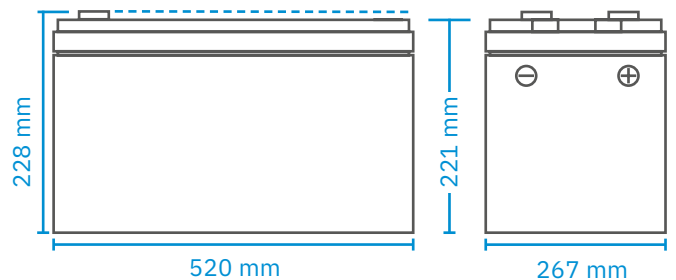


Compliance

Certifications	CE (Battery) UN38.3 (Battery) RoHS
Shipping Classification	UN 3480, CLASS 9


**Cycle Life vs. Depth of Discharge (DOD)
Discharge 0.5C / Charge 0.5C (25°C)**

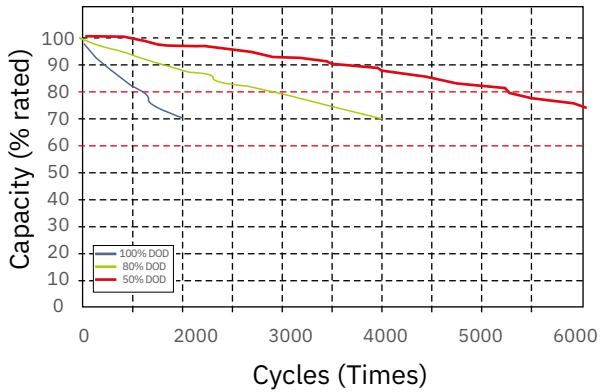


**Discharge Voltage Profiles at 0.5C Discharge Rate
(Various Ambient Temperatures)**

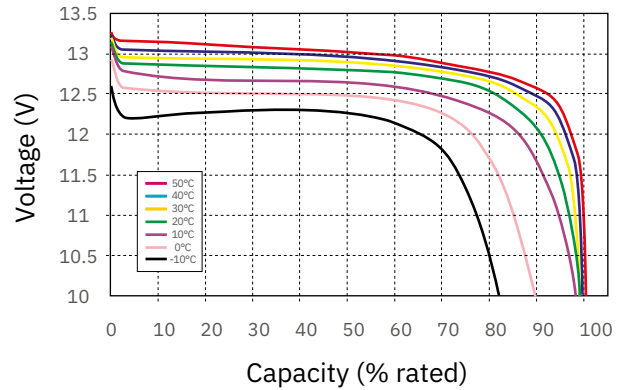


Discharge Voltage Profiles at Various Rates (25°C Ambient Temperature)

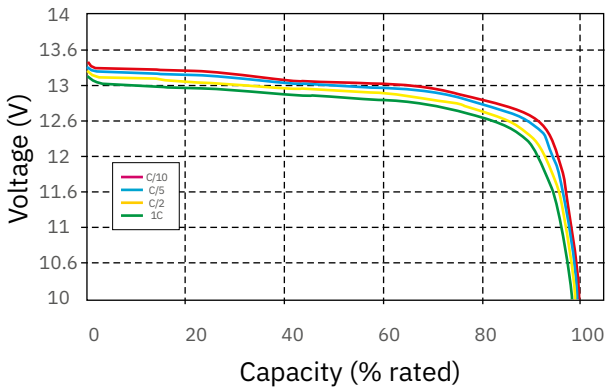

**Typical Voltage and SOC Profiles at 0.5C Charging
(25°C Ambient Temperature)**

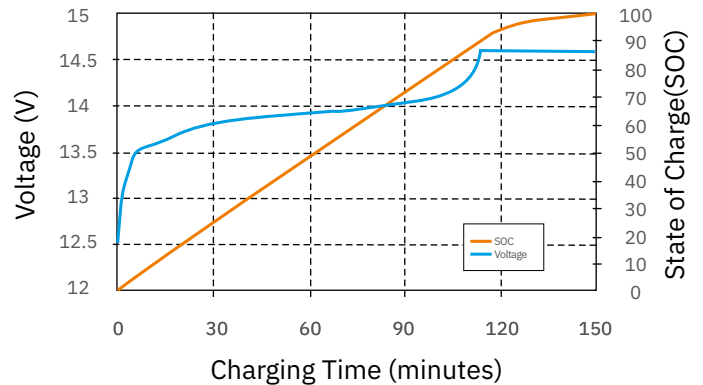

Charging Characteristics (0.5C at 20°C)

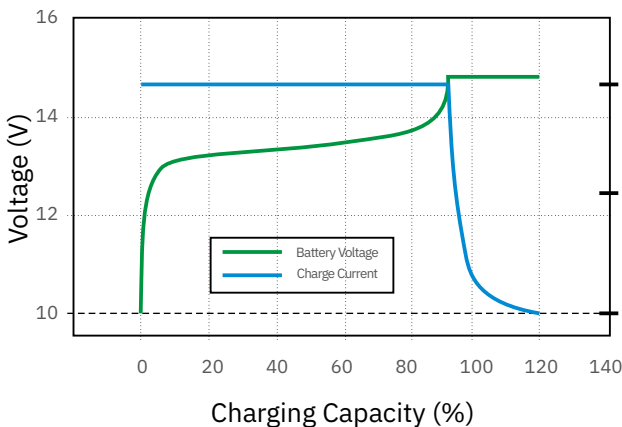

Constant Power Discharge Characteristics (25°C Ambient Temperature)

