

# LC 75L

LiFePO<sub>4</sub> Battery | 12.8V | 75Ah | 960Wh



## Electrical Specifications

Nominal Voltage	12.8V
Nominal Capacity	75Ah
Capacity Tolerance	± 4%
Capacity @ 25 A	180min
Energy	960Wh
Resistance	≤ 20 mΩ @ 50% SOC
Self Discharge	< 3% / month
Cell Type	IFR26650EC - LiFePO <sub>4</sub>

## Discharge Specifications

Max. Continuous Discharge Current	75A
Peak Discharge Current	150A (3s)
BMS Discharge Cut-Off Current	280A ±50A (5 to 13ms)
Recommended Low Voltage Disconnect	11V
BMS Discharge Cut-Off Voltage	> 8V (120 to 180ms)
Reconnect Voltage	> 10V (2.5V / Zelle)
Short Circuit Protection	200 to 600μs

## Charge Specifications

Recommended Charge Current	15A
Maximum Charge Current	75A
Recommended Charge Voltage	14.6V
BMS Charge Cut-Off Voltage	< 15.6V (3.9V/Zelle)
Reconnect Voltage	> 15.2V (3.8V/Zelle)
Float Charge Voltage	< 14.4V (3.6V/Zelle)
Maximum Batteries in Series	4


## Mechanical Specifications

Measurements (L × W × H)	260 × 168 × 218 mm
Approx. Weight	10.7 kg
Terminal Type	M8
Terminal Torque	9 to 11 N m
Case Material	ABS
Enclosure Protection	IP65

## Temperature Specifications

Discharge Temperature	-20 to 60°C
Charge Temperature	0 to 45°C
Storage Temperature	-5 to 35°C
BMS High Temperature Cut-Off	85°C
Reconnect Temperature	63°C


## Measurements

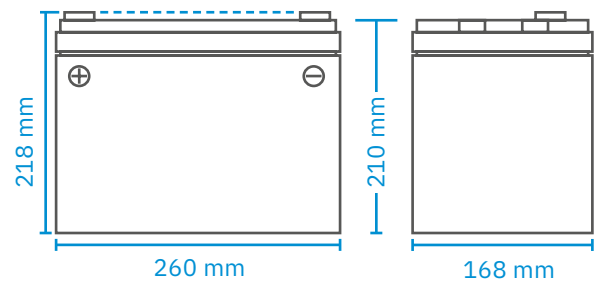


## Compliance

Certifications	CE (Battery) UN38.3 (Battery) RoHS
Shipping Classification	UN 3480, CLASS 9


**Cycle Life vs. Depth of Discharge (DOD)  
Discharge 0.5C / Charge 0.5C (25°C)**

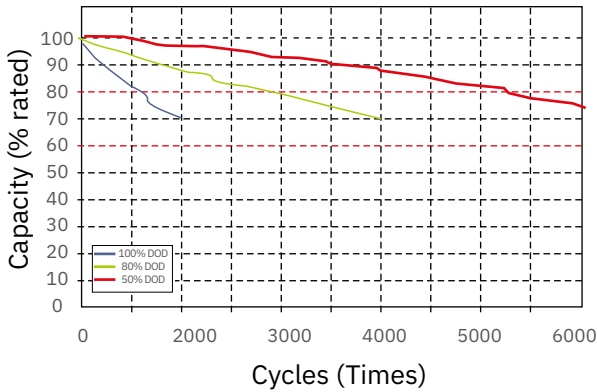


**Discharge Voltage Profiles at 0.5C Discharge Rate  
(Various Ambient Temperatures)**

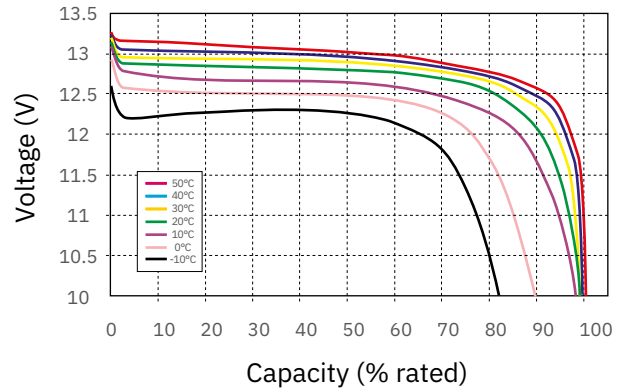


**Discharge Voltage Profiles at Various Rates (25°C Ambient Temperature)**

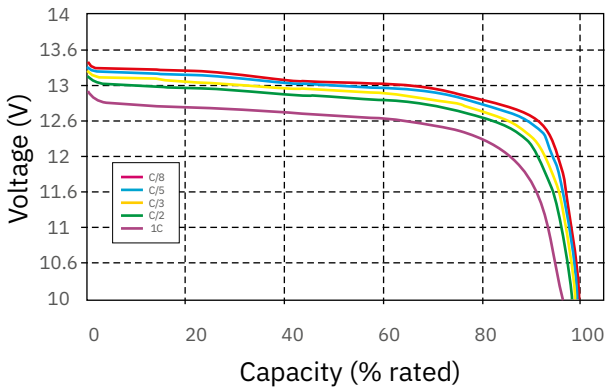

**Typical Voltage and SOC Profiles at 0.5C Charging  
(25°C Ambient Temperature)**

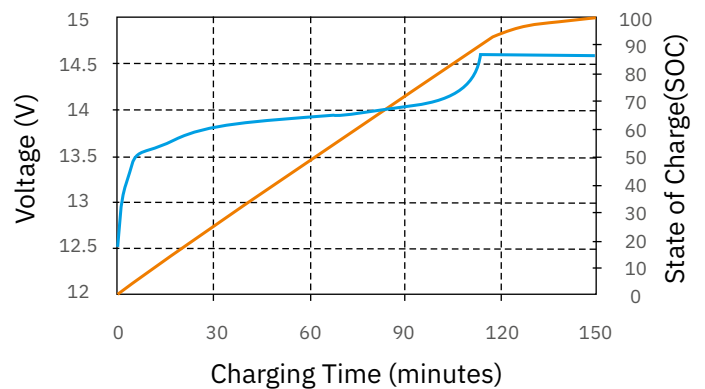

**Charging Characteristics (0.5C at 20°C)**

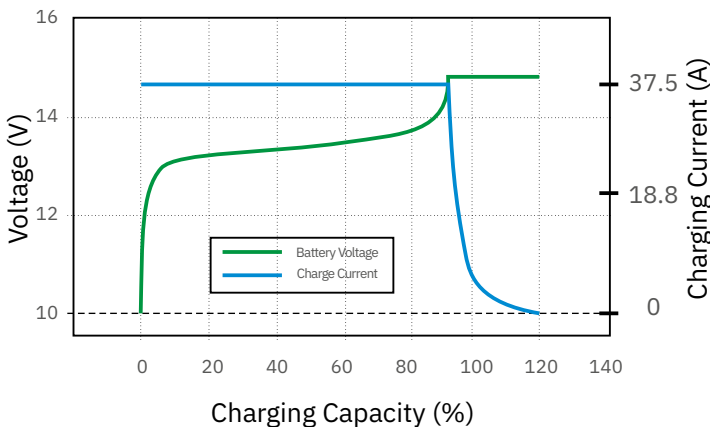

**Constant Power Discharge Characteristics (25°C Ambient Temperature)**

